

GNB-20

GNB-25

### Product Features

- Most popularly used pump worldwide. The Groz version of the Rotary Pump is superior to any other with features such as Dual Directional Operation which allows the pump to both empty, as well as refill containers
- Extremely Heavy Duty & rugged weighing 6.6 kgs (14.5 lbs)
- Pump body is sturdy cast iron with precisely machined cast iron vanes for better draw & smoother delivery
- Pump seals are made from Hi Nitrile rubber
- Fits 15 gallons (50 litre) to 55 gallons (205 litre) barrels
- Comes complete with suction tube, 2" cast iron bung nut & discharge spout

#### WETTED COMPONENTS

Steel, Cast Iron, NBR

#### RECOMMENDED USE


For dispensing Diesel, Kerosene, Heating Oils, Motor Oils, Lubricating Oils (upto SAE 90), and other non-corrosive media

#### DO NOT USE

With water based media, Antifreeze, Solvents, Acids, and Gasoline etc.

#### Dual Directional Operation:

Pumps in either direction by a few reverse turns of the handle

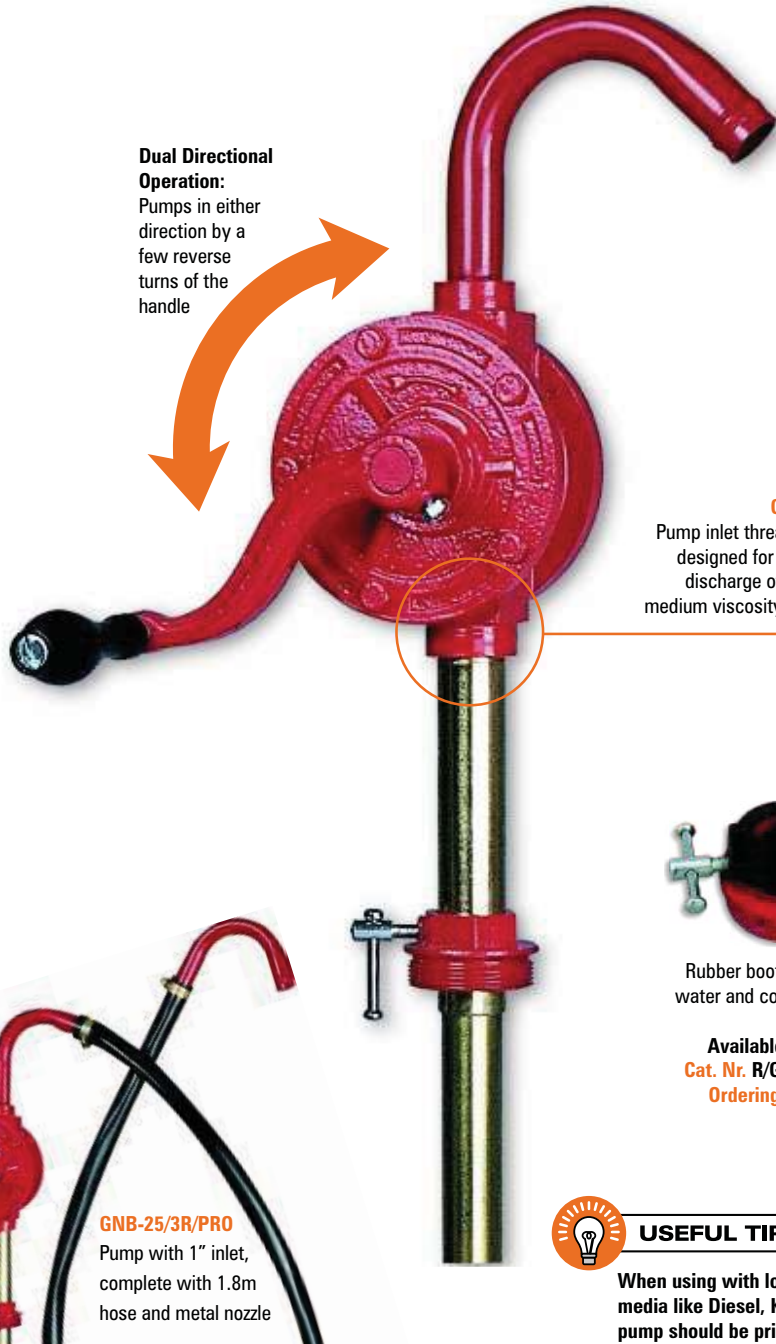

#### GNB-25

Pump inlet threaded 1" designed for volume discharge of low to medium viscosity media




Rubber boot keeps rain water and contaminants away.

Available as spare:  
Cat. Nr. R/GNB/DN/01  
Ordering Nr. 44092

### Variants



**GNB-20**  
Pump inlet threaded 3/4" designed for use with high viscosity media

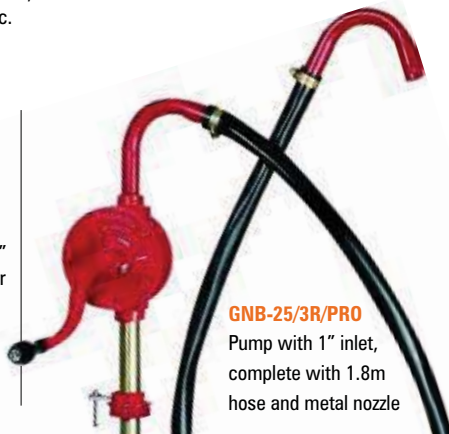

**GNB-25/3R/PRO**  
Pump with 1" inlet, complete with 1.8m hose and metal nozzle

### Ordering Information

| CAT. NR.        | ORDERING NR. | PUMP INLET | DISCHARGE SPOUT                | SUCTION TUBE |
|-----------------|--------------|------------|--------------------------------|--------------|
| GNB-20T/SPL     | 44000        | 3/4"       | Steel                          | Telescopic   |
| * GNB-25T/SPL   | 44050        | 1"         | Steel                          | Telescopic   |
| * GNB-25/3R/SPL | 44052        | 1"         | Steel                          | 3 pc. Rigid  |
| GNB-25/3R/PRO   | 44058        | 1"         | With 1.8 m hose & metal nozzle | 3 pc. Rigid  |
| GNB-25T/PRO     | 44059        | 1"         | With 1.8 m hose & metal nozzle | Telescopic   |



### USEFUL TIPS!

When using with low viscosity media like Diesel, Kerosene etc., pump should be primed by adding 30 ml of media being pumped or any oil into the pump outlet

### DELIVERS

Per 20 turns for Diesel Fuel:  
GNB-20: 2.85 litre ( 0.75 gal.)  
GNB-25: 5 litre ( 1.30 gal.)

### Key

\* Best Seller